

## Products



**When you need a lift, you know it must be a Genie.** Genie sets the standard by which other lifts are judged. Simply put, we build a better lift for every job. With four decades of experience, Genie provides the most advanced lifting equipment in the industry and our full line of products offers unmatched performance, safety and reliability.



Aerial Work Platforms



Articulating Booms



Material Lifts



Scissor Lifts



Telescopic Booms



Telehandlers



Trailer Mounted Booms



Trailer Mounted Light Towers



Generators



Power Buggies

# SPECIFICATIONS


## SELF-PROPELLED SCISSORS

MODEL	WORKING HEIGHT		WIDTH		TURNING RADIUS*		LIFT CAPACITY		GRADEABILITY**
	US	Metric	US	Metric	US	Metric	US	Metric	
<b>ELECTRIC SCISSOR LIFTS</b>									
GS™-1530	21 ft	6.57 m	2 ft 6 in	.76 m	5 ft 1 in	1.55 m	600 lbs	272 kg	30%
GS™-1930	25 ft	7.79 m	2 ft 6 in	.76 m	5 ft 1 in	1.55 m	500 lbs	227 kg	30%
GS™-2032	26 ft	8.10 m	2 ft 8 in	.81 m	7 ft	2.13 m	800 lbs	363 kg	30%
GS™-2632	32 ft	9.92 m	2 ft 8 in	.81 m	7 ft	2.13 m	500 lbs	227 kg	25%
GS™-3232	38 ft	11.75 m	2 ft 8 in	.81 m	7 ft	2.13 m	500 lbs	227 kg	25%
GS™-2046	26 ft	8.10 m	3 ft 10 in	1.17 m	7 ft 6 in	2.29 m	1,200 lbs	544 kg	30%
GS™-2646	32 ft	9.92 m	3 ft 10 in	1.17 m	7 ft 6 in	2.29 m	1,000 lbs	454 kg	30%
GS™-3246	38 ft	11.75 m	3 ft 10 in	1.17 m	7 ft 6 in	2.29 m	700 lbs	318 kg	25%
GS™-2668 DC	32 ft	9.92 m	5 ft 8 in	1.73 m	12 ft 1 in	3.68 m	1,250 lbs	567 kg	30%
GS™-3268 DC	38 ft	11.75 m	5 ft 8 in	1.73 m	12 ft 1 in	3.68 m	1,000 lbs	454 kg	25%

<b>ROUGH TERRAIN SCISSOR LIFTS</b>									
GS™-2668 RT	32 ft	9.92 m	5 ft 8 in	1.73 m	12 ft 1 in	3.68 m	1,250 lbs	567 kg	35%
GS™-3268 RT	38 ft	11.75 m	5 ft 8 in	1.73 m	12 ft 1 in	3.68 m	1,000 lbs	454 kg	30%
GS™-3384 RT	39 ft	12.06 m	7 ft	2.13 m	19 ft 6 in	5.94 m	2,500 lbs	1,134 kg	50%
GS™-3390 RT	39 ft	12.06 m	7 ft 6 in	2.29 m	17 ft 6 in	5.33 m	2,500 lbs	1,134 kg	50%
GS™-4390 RT	49 ft	15.11 m	7 ft 6 in	2.29 m	17 ft 6 in	5.33 m	1,500 lbs	680 kg	50%
GS™-5390 RT	59 ft	18.15 m	7 ft 6 in	2.29 m	17 ft 6 in	5.33 m	1,500 lbs	680 kg	40%




\*Outside

\*\*Gradeability applies to driving on slopes, see operator's manual for details regarding slope ratings. Gradeability may vary depending on options installed on machine.

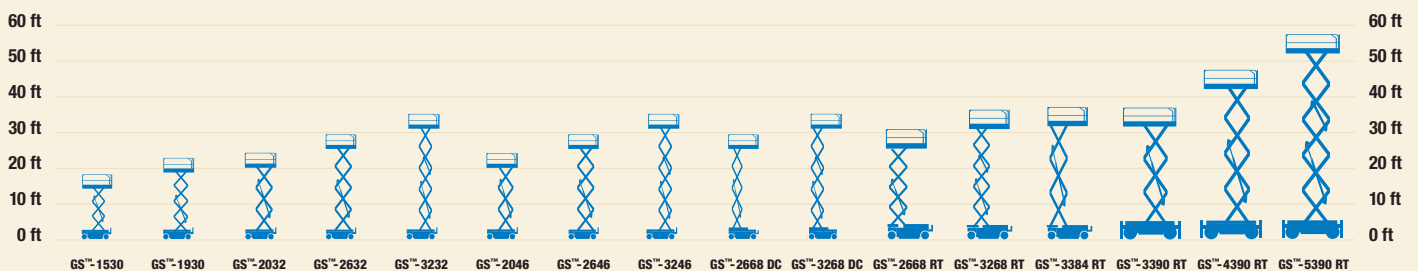

# Specifications

MODELS	GS™-2032		GS™-2632		GS™-3232	
	US	Metric	US	Metric	US	Metric
Working height maximum*	26 ft	8.10 m	32 ft	9.92 m	38 ft	11.75 m
<b>A</b> Platform height maximum	20 ft	6.10 m	26 ft	7.92 m	32 ft	9.75 m
<b>B</b> Platform length - outside	7 ft 5 in	2.26 m	7 ft 5 in	2.26 m	7 ft 5 in	2.26 m
extended	10 ft 5 in	3.18 m	10 ft 5 in	3.18 m	10 ft 5 in	3.18 m
Slide-out platform extension deck	3 ft	.91 m	3 ft	.91 m	3 ft	.91 m
<b>C</b> Platform width - outside	2 ft 8 in	.81 m	2 ft 8 in	.81 m	2 ft 8 in	.81 m
Guardrail height: fixed rails	3 ft 3 in	.99 m	—	—	—	—
fold down rails (CE)	3 ft 7 in	1.10 m	3 ft 7 in	1.10 m	3 ft 7 in	1.10 m
Toeboard height	6 in	.15 m	6 in	.15 m	6 in	.15 m
<b>D</b> Height - stowed						
fixed rails	6 ft 8 in	2.03 m	—	—	—	—
folding guardrails (CE)	7 ft	2.13 m	7 ft 5 in	2.26 m	8 ft	2.43 m
rails folded	5 ft 9 in	1.75 m	6 ft 3 in	1.91 m	6 ft 8 in	2.03 m
<b>E</b> Length - stowed	8 ft	2.44 m	8 ft	2.44 m	8 ft	2.43 m
Length - extended	10 ft 11 in	3.33 m	10 ft 11 in	3.33 m	10 ft 11 in	3.33 m
<b>F</b> Width	2 ft 8 in	.81 m	2 ft 8 in	.81 m	2 ft 8 in	.81 m
<b>G</b> Wheelbase	6 ft 1 in	1.85 m	6 ft 1 in	1.85 m	6 ft 1 in	1.85 m
<b>H</b> Ground clearance - center	3.5 in	.09 m	3.5 in	.09 m	3.5 in	.09 m
<b>I</b> - with pothole guards deployed	.75 in	.02 m	.75 in	.02 m	.75 in	.02 m

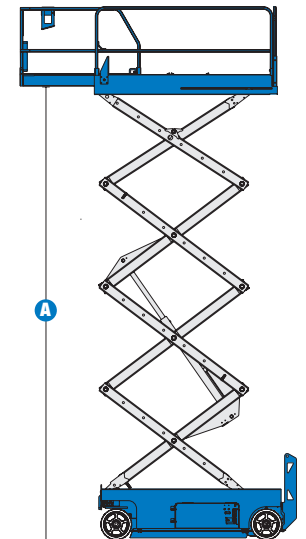

PRODUCTIVITY						
Lift capacity	800 lbs	363 kg	500 lbs	227 kg	500 lbs	227 kg
Extension deck capacity	250 lbs	113 kg	250 lbs	113 kg	250 lbs	113 kg
Drive height	full height		full height		22 ft	6.71 m
Drive speed - stowed	2.2 mph	3.5 km/h	2.2 mph	3.5 km/h	2.2 mph	3.5 km/h
Drive speed - raised	0.5 mph	0.8 km/h	0.5 mph	0.8 km/h	0.5 mph	0.8 km/h
Gradeability - stowed**	30%		25%		25%	
Maximum outrigger leveling: front to back	—		—		3°	
side to side	—		—		5°	
Turning radius - inside	zero	zero	zero	zero	zero	zero
Turning radius - outside	7 ft	2.13 m	7 ft	2.13 m	7 ft	2.13 m
Raise / lower speed	30 / 34 sec	30 / 34 sec	30 / 40 sec	30 / 40 sec	57 / 40 sec	57 / 40 sec
Controls	proportional		proportional		proportional	
Drive	dual front wheel		dual front wheel		dual front wheel	
Multiple disc brakes	dual rear wheel		dual rear wheel		dual rear wheel	
Tires - solid non-marking	15 x 5 x 11 in	38 x 13 x 28 cm	15 x 5 x 11 in	38 x 13 x 28 cm	15 x 5 x 11 in	38 x 13 x 28 cm

POWER						
Power source	24 V DC (four 6V 225 Ah batteries)		24 V DC (four 6V 225 Ah batteries)		24 V DC (four 6V 225 Ah batteries)	
Hydraulic system capacity	3.75 gal	14.2 L	3.75 gal	14.2 L	3.75 gal	14.2 L

WEIGHT***						
ANSI, CSA	3,574 lbs	1,621 kg	4,413 lbs	2,002 kg	5,185 lbs	2,352 kg
CE, AUS	4,024 lbs	1,825 kg	4,313 lbs	1,956 kg	5,185 lbs	2,352 kg

**STANDARDS COMPLIANCE** ANSI A92.6, CSA B354.2, CE Compliance, AS 1418.10

\* The metric equivalent of working height adds 2 m to platform height. U.S. adds 6 ft to platform height.  
 \*\* Gradeability applies to driving on slopes. See operator's manual for details regarding slope ratings.  
 \*\*\* Weight will vary depending on options and/or country standards.

## Features

### STANDARD FEATURES

#### MEASUREMENTS

##### GS™-2032

- 26 ft (8.10 m) working height
- Up to 800 lb (363 kg) lift capacity

##### GS™-2632

- 32 ft (9.92 m) working height
- Up to 500 lb (227 kg) lift capacity

##### GS™-3232

- 38 ft (11.75 m) working height
- Up to 500 lb (227 kg) lift capacity

#### PRODUCTIVITY

- 89 x 32 in (2.26 x .81 m) steel platform
- 36 in (.91 m) extension deck
- Fixed rail with chain entry gate (standard GS-2032)
- Folding rails with half-height swing gate (standard on all CE, GS-2632, GS-3232)
- Automatic leveling outriggers (GS-3232 only)
- Dual front wheel drive
- Automatic battery charger
- Proportional lift and drive
- Onboard diagnostic system
- AC power to platform
- Manual platform lowering valve
- Emergency stop at both platform and ground controls
- Multiple disc brakes
- Brake release
- Solid non-marking tires
- Pothole guards
- Tilt level sensor with audible alarm
- Descent alarm
- Electronic horn
- Hour meter

#### POWER

- 24 V DC (four 6 V 225 Ah batteries)

### OPTIONS & ACCESSORIES

#### PRODUCTIVITY

- Folding rails with half-height swing gate (GS-2032)
- Platform swing gate, half-height (GS-2032)
- Air line to platform
- Dual flashing beacons
- Motion package
- Platform work lights
- Automotive horn
- Laser locator (GS-3232)

#### POWER

- Power Inverter
- Maintenance-free batteries
- EE rating



### Genie United States

18340 NE 76th Street  
P.O. Box 97030  
Redmond, Washington 98073-9730

Telephone **(425) 881-1800**  
Toll Free in USA/Canada **800-536-1800**  
Fax (425) 883-3475

### Genie Europe

The Maltings  
Wharf Road  
Grantham NG31 6BH  
U.K.

Telephone **+44 (0)1476 584333**  
Fax +44 (0)1476 584334

Email: [infoeurope@genieind.com](mailto:infoeurope@genieind.com)

### Distributed By:

Effective Date: July, 2007. Product specifications and prices are subject to change without notice or obligation. The photographs and/or drawings in this document are for illustrative purposes only. Refer to the appropriate Operator's Manual for instructions on the proper use of this equipment. Failure to follow the appropriate Operator's Manual when using our equipment or to otherwise act irresponsibly may result in serious injury or death. The only warranty applicable to our equipment is the standard written warranty applicable to the particular product and sale and we make no other warranty, express or implied. Products and services listed may be trademarks, service marks or trade-names of Terex Corporation, Genie Industries, Inc. and/or their subsidiaries in the U.S.A. and many other countries and all rights are reserved. Terex™ is a Registered Trademark of Terex Corporation in the U.S.A. and many other countries. Genie® is a Registered Trademark of Genie Industries, Inc. in the U.S.A. and many other countries. Genie is a Terex Company. Copyright © 2007 Terex Corporation.